



EnergyLED

6F.,NO.542-4,Zhongzheng Rd ., Xindian Dist.,
,New Taipei City 231,Taiwan (R.O.C)
TEL : 886-2-7729-0589
FAX : 886-2-7729-1871
<http://www.energyled.com>

SPECIFICATION

PART NO. : TA20MH84DG0S1

FOOD-AC LED Light Tube
(Full voltage Series)
4FT(1198mm)

Approved by

Checked by

Prepared by

--


--

--



Dimensions:

PART NO.	L ± 3.0(mm)
TA20MH84DG0S1	1198mm (4FT)

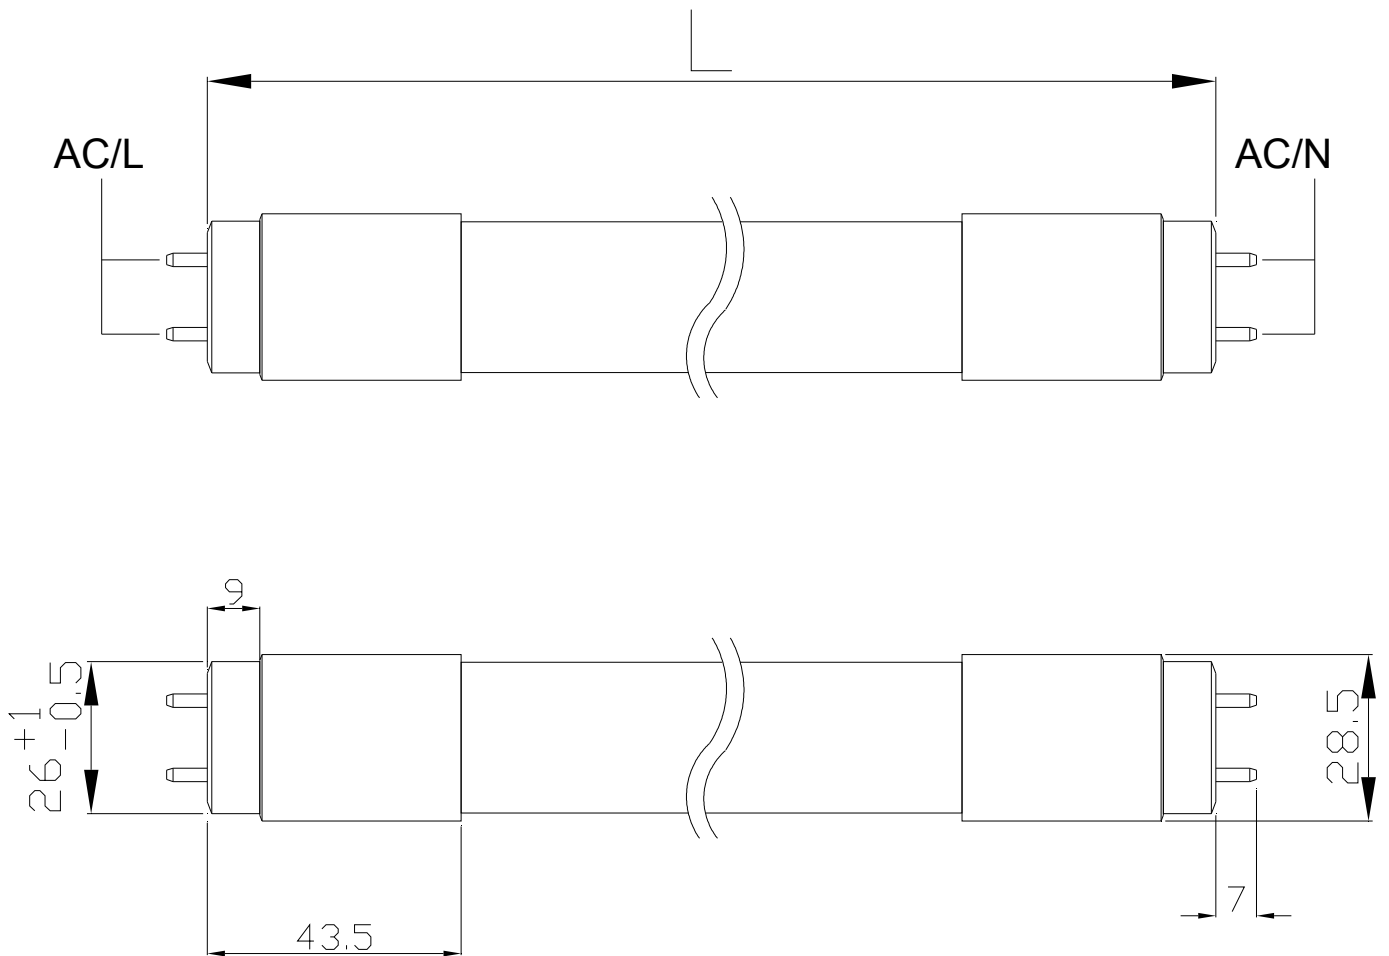

1. All dimensions are in millimeters.
2. Tolerance is ± 0.5 mm (± 0.02 inch) unless otherwise noted.

**Absolute Maximum Ratings:**

AC Input Range	AC100~265V /47~63Hz
Power Factor	≥ 0.9
Weight	137g@ 4FT
Ra	>80
Operating Temperature Range	-30 ~ +45°C
Storage Temperature Range	-40 ~ +65°C

Electrical And Optical Characteristics:


PART NO.	Correlated Color Temperature (K)	Condition (V)	Illuminance (LUX) @ 1m distance		Luminous Flux (lm)		Power Consumption (W)		
			min	typ	min	typ	min	typ	max
			TA20WH84DG0S1	3600K±500	AC220V (60Hz)	340	380	1000	1200




Chromaticity Coordinates Specifications for Bin Grading(CTT:3600K):

CIE Color Parameter

1.0=168.0506mW/nm

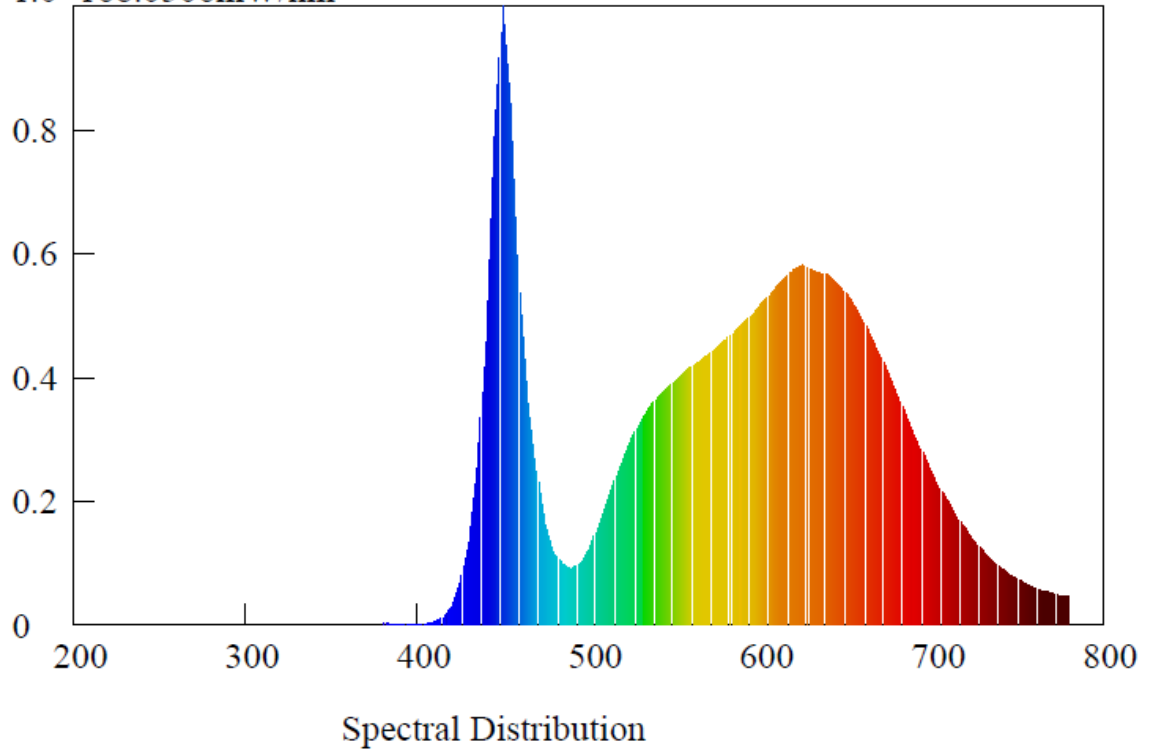


Standard accessories installation:

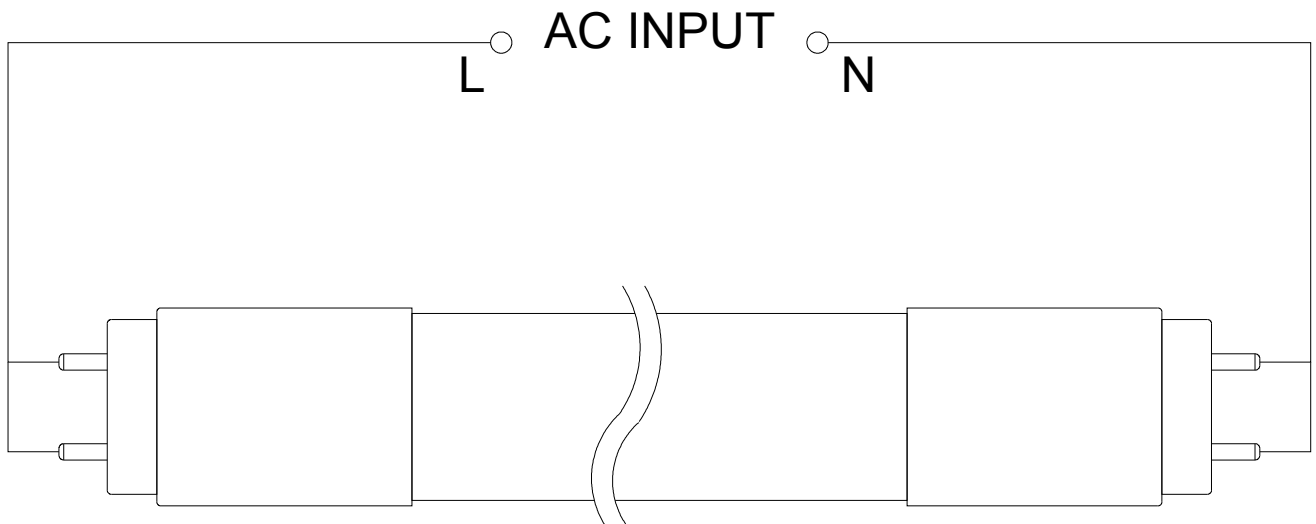



Encased Type:

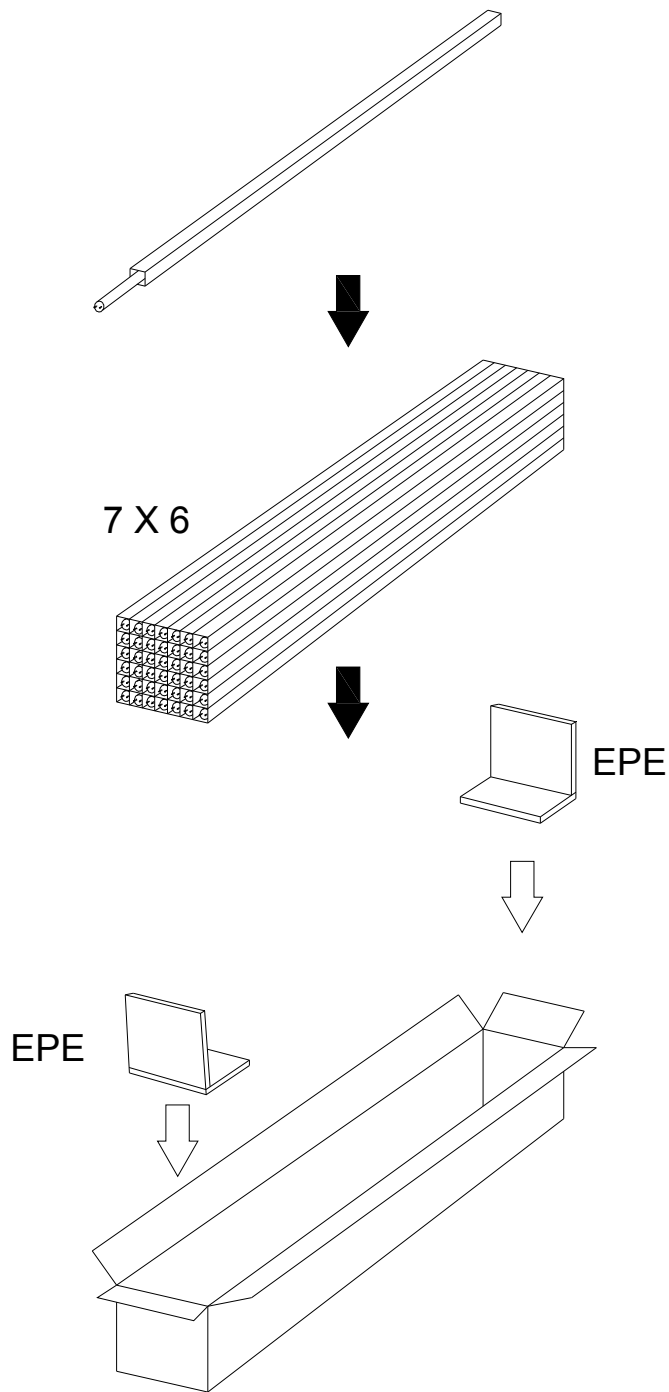

PART NO.	Quantity	L(mm)	W(mm)	H(mm)
TA20MH84DG0S1	42 PCS	1235	230	240

OUTTER CARTON