



**EnergyLED**

(Zone 22) North Guiyuan Rd., West Jixi Rd.,  
Duanzhou District, Zhaoqing City Guangdong  
Province, China

TEL:86-0758-2833488,2877017

FAX:86-0758-2878014

<http://www.energyled.com>

# SPECIFICATION

*PART NO. : HBFED1E-UNF1-XX1-030*

**Flood Light**

**Preliminary**

**IP66**

Approved by

Checked by

Prepared by

*Yang*

*Mark*

*Sean*



HBFED1E-UNF1-XX1-030

## LIGHTING

[illegible]

**Part Number Information:**HBFED1E-UNF1-XX1-030

SS:2700K

WW:3000K


TW:4000K

DW:5000K

CW:5700K

EW:6000K

NW:6500K

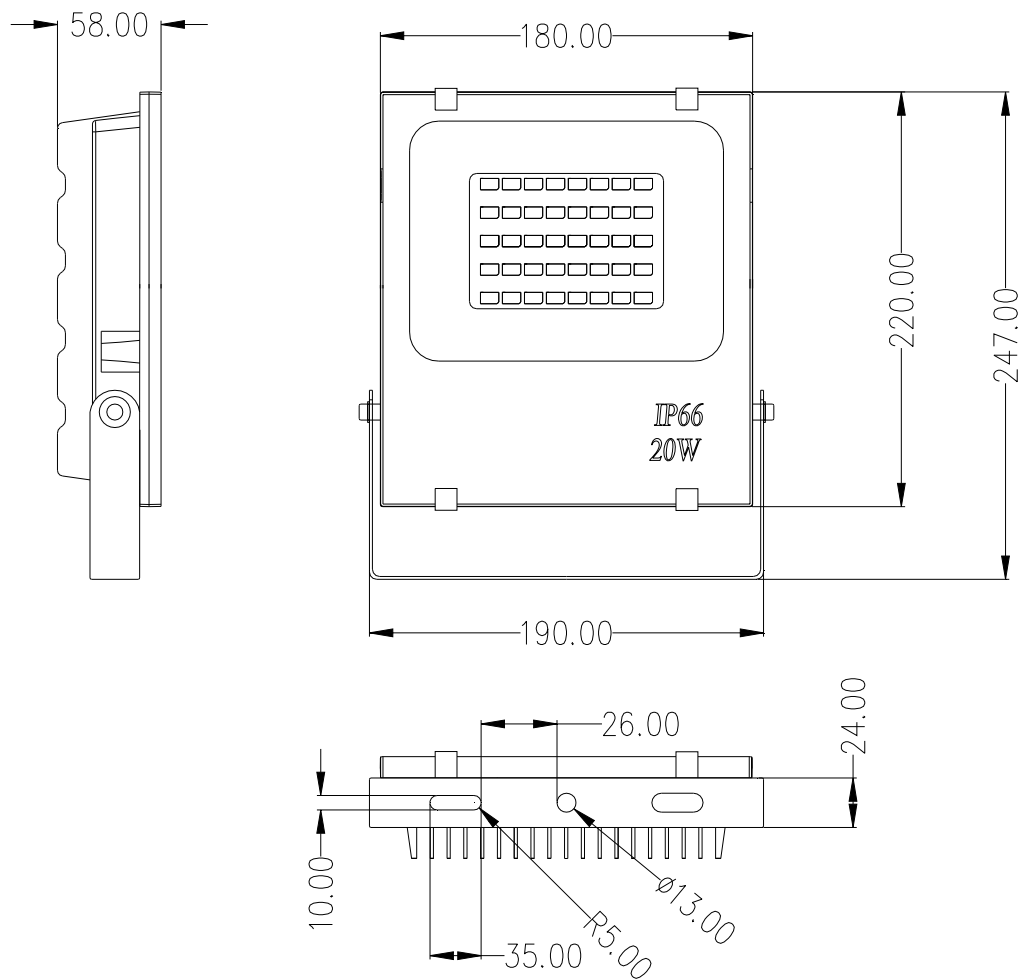**Dimensions:**

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 5$  mm unless otherwise noted.
3. 4.IP degrees: IP66.

**Description**

Part No.	Emitting Color	CCT	Operation Voltage
HBFED1E-UNF1-SS1-030	Warm White	2700K	100-277 VAC
HBFED1E -UNF1-WW1-030	Warm White	3000K	100-277 VAC
HBFED1E -UNF1-TW1-030	Warm White	4000K	100-277 VAC
HBFED1E -UNF1-DW1-030	White	5000K	100-277 VAC
HBFED1E -UNF1-CW1-030	White	5700K	100-277 VAC
HBFED1E -UNF1-EW1-030	White	6000K	100-277 VAC
HBFED1E -UNF1-NW1-030	White	6500K	100-277 VAC

**Absolute Maximum Ratings at Ta=25 °C**

Parameter	Symbol	Rating	Unit
Operating Temperature Range	Topr.	-25 to +45	°C
Storage Temperature Range	Tstg.	-40 to +60	°C
L-N Class II (2 ohm) (IEC61000-4-5 2014)	---	4000	V
Operating Humidity ( non – condensing )	%	20~90	RH

**Electrical And Optical Characteristics:****PART NO. : HBFED1E-UNF1-SS1-030**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Flux	$\Phi_v$	220 VAC	2500	3000	--	lm
Correlated Color Temperature	CCT		2400	2700	3000	K
Color Index	%		80	-	-	Ra
Viewing Angle	$\Delta\theta$		--	110°	--	Deg
Power Consumption	P <sub>D</sub>		27	30	33	W
Power Factor	%		0.90	--	--	--

**PART NO. : HBFED1E-UNF1-WW1-030**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Flux	$\Phi_v$	220 VAC	2500	3000	--	lm
Correlated Color Temperature	CCT		2700	3000	3300	K
Color Index	%		80	-	-	Ra
Viewing Angle	$\Delta\theta$		--	110°	--	Deg
Power Consumption	P <sub>D</sub>		27	30	33	W
Power Factor	%		0.90	--	--	--

**PART NO. : HBFED1E-UNF1-TW1-030**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Flux	$\Phi_v$	220 VAC	2500	3000	--	lm
Correlated Color Temperature	CCT		3500	4000	4500	K
Color Index	%		80	-	-	Ra
Viewing Angle	$\Delta\theta$		--	110°	--	Deg
Power Consumption	P <sub>D</sub>		27	30	33	W
Power Factor	%		0.90	--	--	--

**PART NO. : HBFED1E-UNF1-DW1-030**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Flux	$\Phi_v$	220 VAC	2500	3000	--	lm
Correlated Color Temperature	CCT		4500	5000	5500	K
Color Index	%		80	-	-	Ra
Viewing Angle	$\Delta\theta$		--	110°	--	Deg
Power Consumption	P <sub>D</sub>		27	30	33	W
Power Factor	%		0.90	--	--	--

**PART NO. : HBFED1E-UNF1-CW1-030**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Flux	$\Phi_v$	220 VAC	2500	3000	--	lm
Correlated Color Temperature	CCT		5200	5700	6200	K
Color Index	%		80	-	-	Ra
Viewing Angle	$\Delta\theta$		--	110°	--	Deg
Power Consumption	P <sub>D</sub>		27	30	33	W
Power Factor	%		0.90	--	--	--



**PART NO. : HBFED1E-UNF1-EW1-030**


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Flux	$\Phi_v$	220 VAC	2500	3000	--	lm
Correlated Color Temperature	CCT		5500	6000	6500	K
Color Index	%		80	-	-	Ra
Viewing Angle	$\Delta\theta$		--	110°	--	Deg
Power Consumption	P <sub>D</sub>		27	30	33	W
Power Factor	%		0.90	--	--	--



**PART NO. : HBFED1E-UNF1-NW1-030**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Flux	$\Phi_v$	220 VAC	2500	3000	--	lm
Correlated Color Temperature	CCT		5800	6500	7200	K
Color Index	%		80	-	-	Ra
Viewing Angle	$\Delta\theta$		--	110°	--	Deg
Power Consumption	P <sub>D</sub>		27	30	33	W
Power Factor	%		0.90	--	--	--

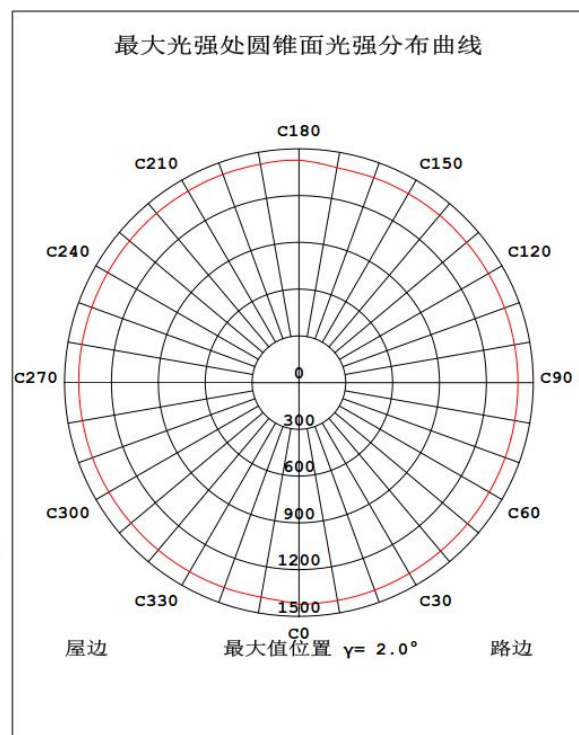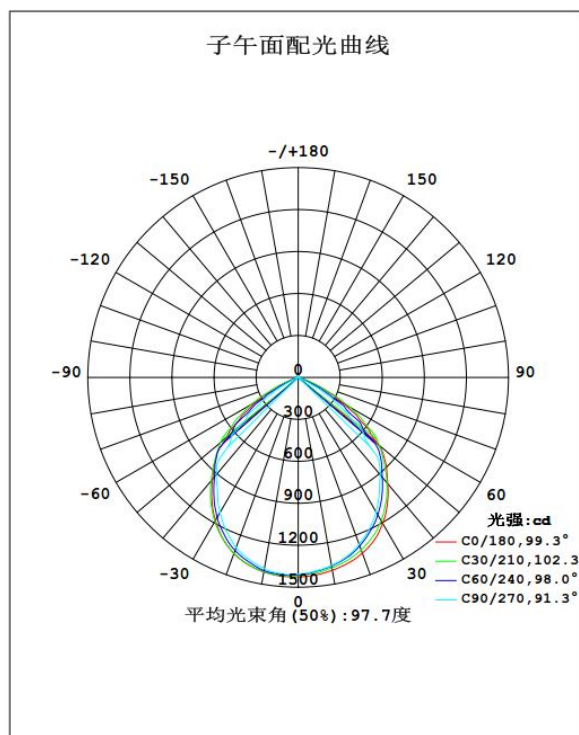

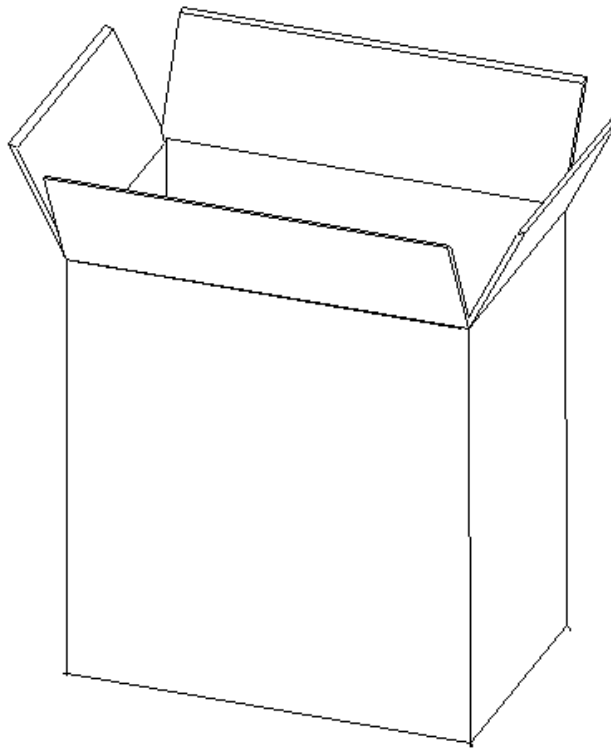**Encased Type:**

<b>PART NO.</b>	<b>Quantity</b>	<b>L(mm)</b>	<b>W(mm)</b>	<b>H(mm)</b>	<b>N.W. (Kg)</b>	<b>G.W. (Kg)</b>
HBFED1E-UNF1-XX1-030	1 PCS	255	210	70	1.1	1.3