



**Energyled**

6F.,NO.542-4,Zhongzheng Rd ., Xindian Dist.,  
,New Taipei City 231,Taiwan (R.O.C)  
TEL : 886-2-7729-0589  
FAX : 886-2-7729-1871  
<http://www.energyled.com.tw>

# SPECIFICATION

*PART NO. : E-1018-x000K*

## Wall Light



# IP54

Approved by

Checked by

Prepared by

**Gary**

-

**Tony**



**MODIFY RECORD**

TAKE EFFECT DATE	MODIFY ISSUES	REMARKS




Part Number Information (型號資訊):

# E-1018-x000K

3: 3000K CCT  
6: 6000K CCT

Dimensions(尺寸):

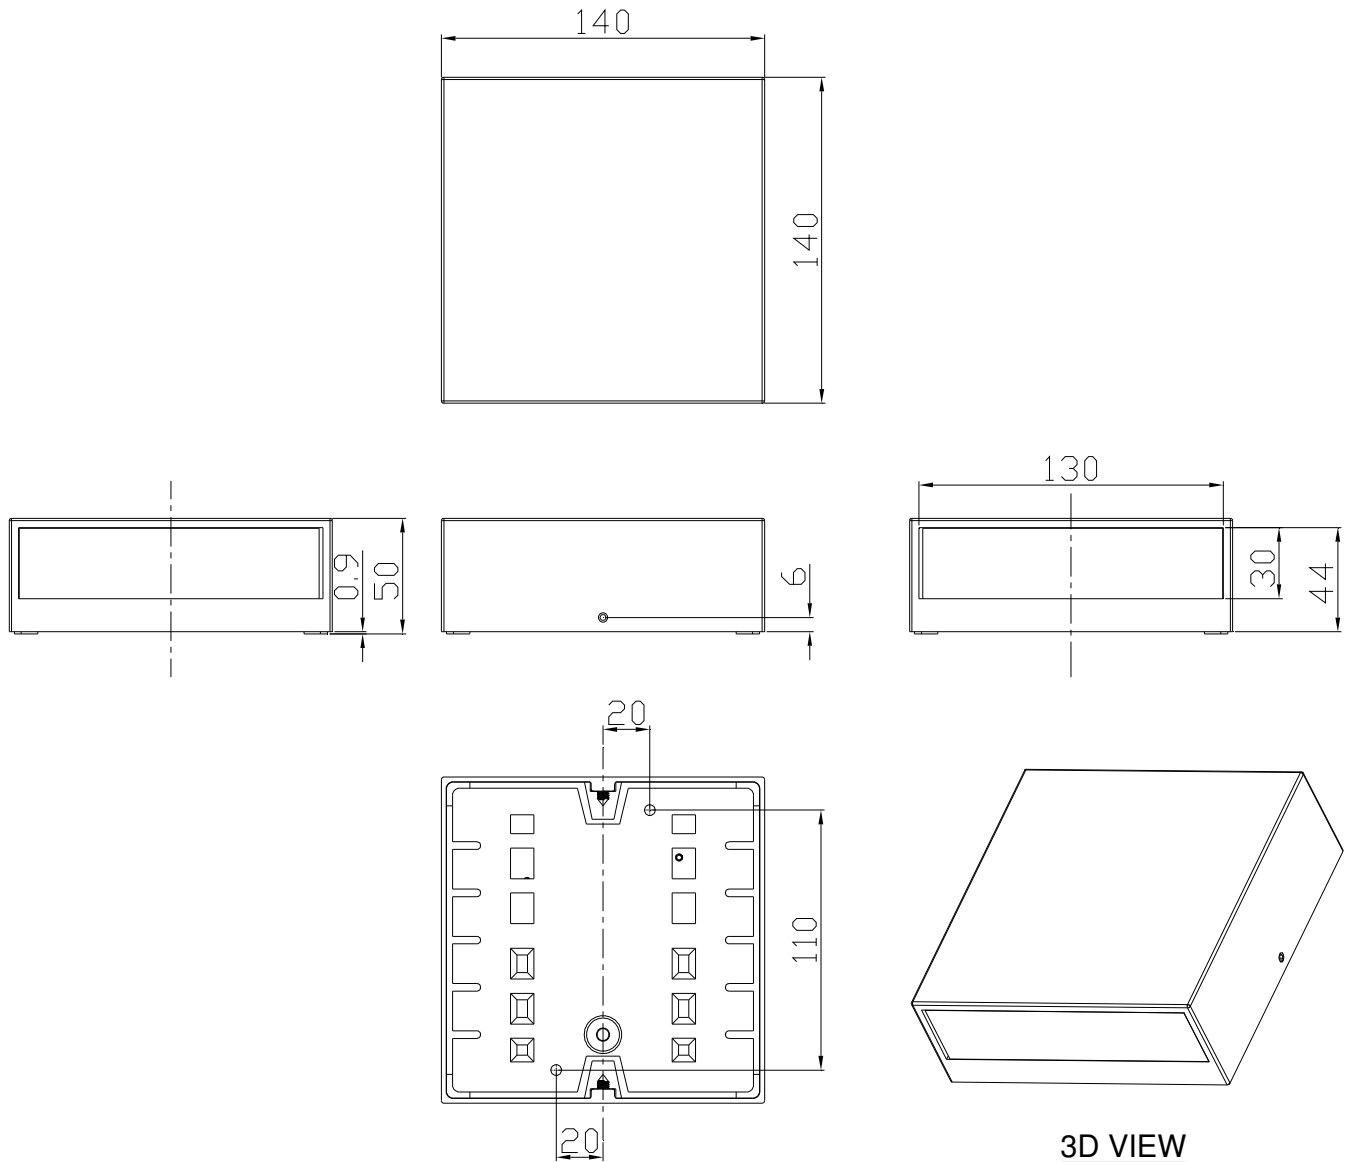

3D VIEW

LED 1W x 6PCS

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 3$  mm unless otherwise noted.




Absolute Maximum Ratings at Ta=25 °C (限制值範圍於 Ta 25°C)

Parameter	Symbol	Rating	Unit
Input Voltage Range	Vac	100 - 240	V
Operating Temperature Range	Topr.	-30 to +50	°C
Storage Temperature Range	Tstg.	-40 to +60	°C


Electrical And Optical Characteristics(光電特性):

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Flux	3000K CCT	$\Phi_v$	220 VAC	450	550	-	lm
	6000K CCT			500	600	-	
Correlated Color Temperature	Warm White	CCT		2700	3000	3300	K
	White			5500	6000	7000	K
Color Index		%		70	-	-	Ra
Power Consumption		P <sub>D</sub>		-	8	-	W

Spectroradiometric Parameters (光譜曲線圖) :

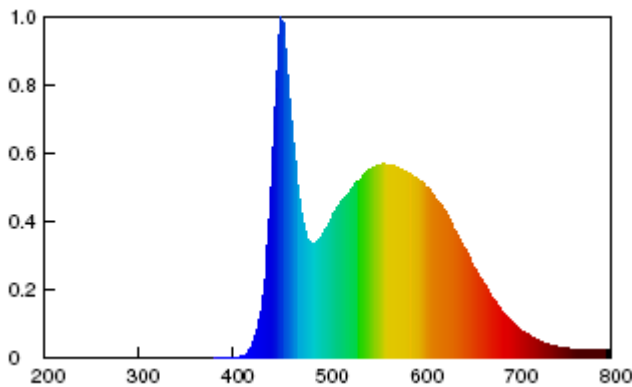

Spectral Distribution (nm) for 6000K

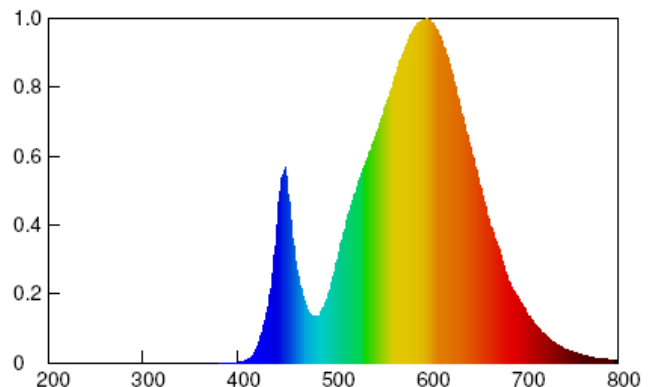

Spectral Distribution (nm) for 3000K