



Energyled

6F.,NO.542-4,Zhongzheng Rd ., Xindian Dist.,
,New Taipei City 231,Taiwan (R.O.C)
TEL : 886-2-7729-0589
FAX : 886-2-7729-1871
<http://www.energyled.com.tw>

SPECIFICATION

PART NO. : E-1261-LED-x000K

Wall Light



IP54

Approved by

Checked by

Prepared by

Gary

-

Tony



EnergyLED

E-1621-LED-x000K

Wall Light

MODIFY RECORD

TAKE EFFECT DATE	MODIFY ISSUES	REMARKS



Part Number Information (型號資訊):




E-1621-LED-x000K



3: 3000K CCT

6: 6000K CCT

Dimensions(尺寸):

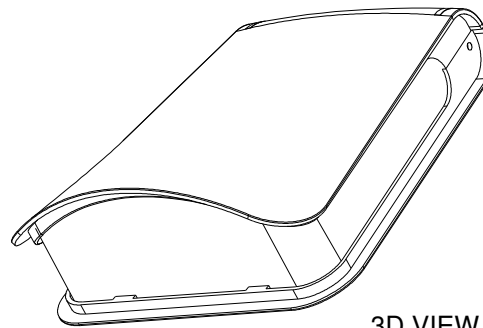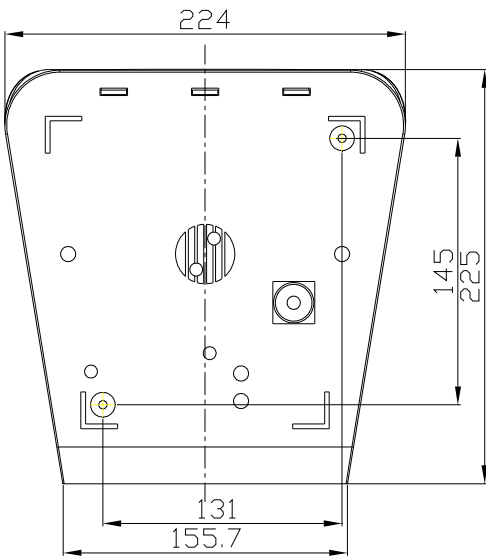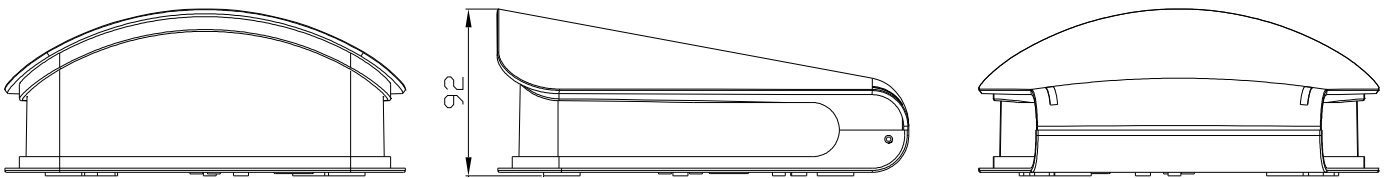

3D VIEW

LED 1W x 6PCS

1. All dimensions are in millimeters.
2. Tolerance is ± 3 mm unless otherwise noted.



Absolute Maximum Ratings at Ta=25 °C (限制值)


範圍於 Ta 25°C)

Parameter	Symbol	Rating	Unit
Input Voltage Range	Vac	100 - 240	V
Operating Temperature Range	Topr.	-30 to +50	°C
Storage Temperature Range	Tstg.	-40 to +60	°C


Electrical And Optical Characteristics(光電特性):

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	
Luminous Flux	3000K CCT	Φ_v	220 VAC	450	550	-	lm	
	6000K CCT			500	600	-		
Correlated Color Temperature	Warm White	CCT		2700	3000	3300	K	
	White			5500	6000	7000	K	
Color Index		%			70	-	-	Ra
Power Consumption		P _D			-	8	-	W

Spectroradiometric Parameters (光譜曲線圖) :

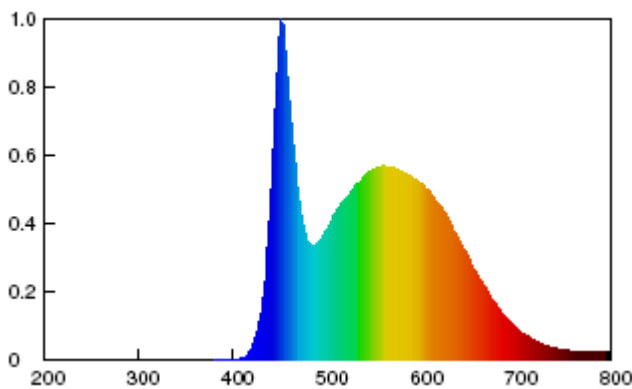

Spectral Distribution (nm) for 6000K

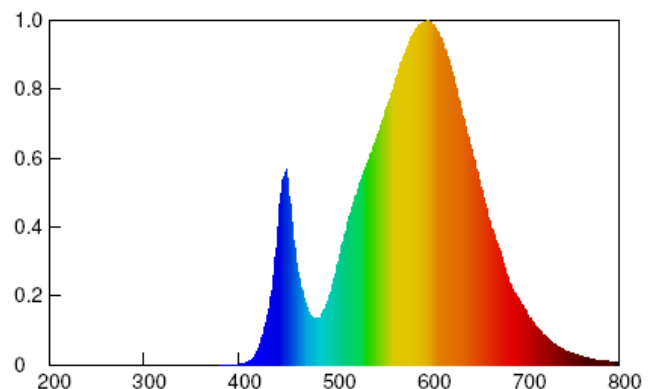

Spectral Distribution (nm) for 3000K